

KRONE 45°-110 DUAL IDC

RJ45 TOP ENTRY JACK

SCALE 1/4


Specifications :

Material :

1. Panel : SPCC, 1.5 mm thickness with Black(RAL 9005) color painted.
2. RJ45 Jack :
  - 2-1. Housing : ABS, UL 94V-0.
  - 2-2. Contact Bracket : PC, UL 94V-2, Transparent color.
3. RJ45 Jack Contact :
  - 3-1. Material : Phosphor Bronze with Nickel plated.
  - 3-2. Finish : 50 micro-inch Gold plated on Plug contact area.
4. IDC
  - 4-1. Housing : PC+Glass Fiber, UL 94V-2.
  - 4-2. Terminal : Phosphor Bronze with Tin plated.
5. Jack Bracket Set : ABS, UL 94V-0.
6. Cable Holder : Nylon.
7. PCB : FR4, UL 94V-0.

Performance :

- a. T568A & T568B wiring.
- b. Insertion force : 20N max. (IEC 60603-7-4)
- c. Retention strength : 7.7 kg between Jack and Plug.
- d. Operating temperature : -10°C to 60°C. (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
- e. Life(mating cycles) :
  - \*Jack : 750 cycles min. (ISO/IEC 11081, IEC 60603-7-4)
  - \*IDC : Suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tools.
- f. The Cat.6 transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.

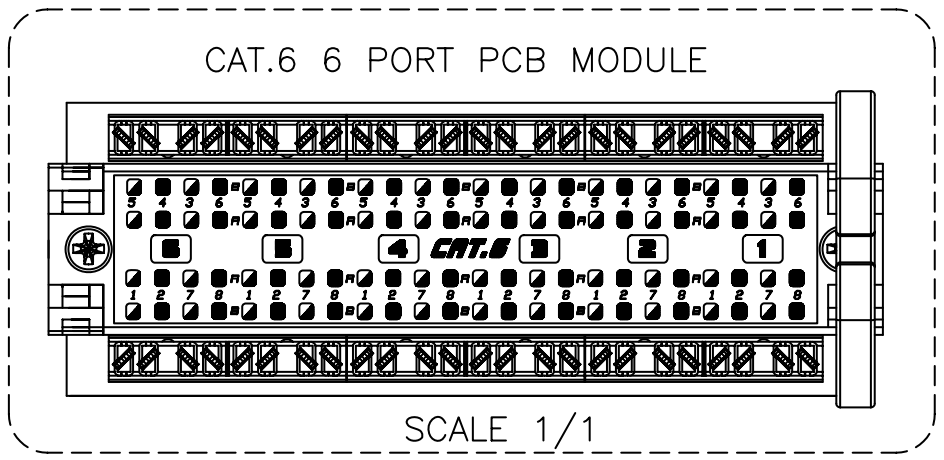

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	01.JUN.2010	MARK	<b>KUWES</b>	
	CHECK	01.JUN.2010	JANE		
	APPROVAL	01.JUN.2010	JAIMY		
	DATE		NAME		ITEM NO.: AKS24T-KAA-C6C
SCALE		1/4(A4)	UNIT	mm	DES.: CAT.6 UNSHIELDED PATCH PANEL
DRAWING NO.		AKS24T-KAA-C6C		DRAWING CLASSIFICATION	
DRAWING CLASSIFICATION		S	SHEET	1 OF 1	A3