


Características Técnicas

DF7-SCAPC-G CONECTOR MECANICO FTTH

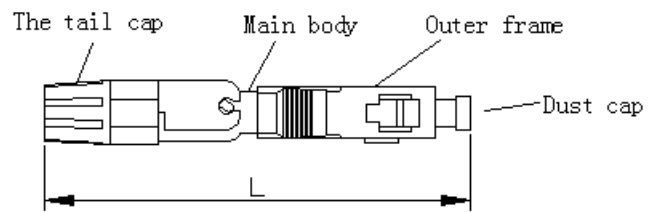

2. Optical Characteristics

Categoría	Especificación	
Applicable for	Drop cable. Indoor cable	
Fiber mode	Single mode or Multi mode	
Operation time	S	About 50(no fiber cut)
Insertion Loss	dB	≤ 0.5
Insertion Loss Typical value	dB	0.3
Return Loss	dB	≥ 45
Fastening strength of naked fiber	N	≥ 5
Tensile strength	N	≥ 50
Reusable	Time	≥ 10 times
Operating Temperature	°C	-40~+85
On-line tensile strength(20N)	dB	$\Delta IL \leq 0.3$
Mechanical durability(500 times)	dB	$\Delta IL \leq 0.3$
Drop-off test(drop-off height4m, once per direction, totally 3 times)	dB	$\Delta IL \leq 0.3$