

NOTES:

1. MATERIAL

1.1 HDMI CABLE: [(7/0.10BC*2C+7/0.10BC*1C+AM)*4PCS+7/0.10BC*1P+7/0.10BC*5C+AL+7/0.12BC+128/0.12ALM+BLACK PVC JACKET.

OD: $\varnothing 6.0 \pm 0.2$ mm

CABLE MARKING: E324703 AWM STYLE 20276 80°C 30V
HIGH SPEED HDMI® CABLE

1.2 HDMI 19PIN MALE: BLACK INSULATION, GOLD PLATED CONTACTS, GOLD PLATED SHELL.

1.3 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL

2.1 100% OPEN AND SHORT TEST.


2.2 CONDUCTOR RESISTANCE: 5 OHMS MAX.

2.3 INSULATION RESISTANCE: 10 MEGOHMS MIN.

2.4 HDTV-DVD TEST : 1080P.

3. ALL MATERIALS ARE ROHS COMPLIANT.

PIN OUT

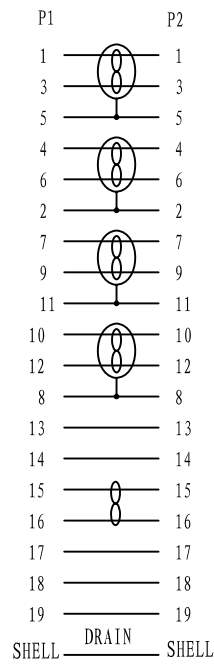

LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1		SCALE: FREE	CUS. NAME:		dLux		ENG: Yico
ANGLE TOLERANCE: X° $\pm 3^\circ$.X° $\pm 1^\circ$		UNIT: mm					PRODUCT NO: N/A
00	NEW ISSUE	2016-12-12			VERSION: 00	PAGE: 1/1	DRAWING NO: HF2306
REV.	MODIFY DESCRIPTION	DATE					